

OBFORMA

LIT - DIFFUSE

OBF-L-DF

DATE	PROJECT	CATALOG #	FIXTURE TYPE
------	---------	-----------	--------------

OVERVIEW

OBFORMA is a graceful acoustic pendant capable of standout architectural patterns and lumens to 18,000. It's made to express conceptual ideas through its massive scaling capabilities, felt color options, and unique lens placement.

QUICK FACTS

- Direct, indirect, or bidirectional light output
- Available in 2700/3000/3500/4000 CCT at 90+ Color Rendering Index (CRI)
- Diffuse engine available in seven sizes: 16, 24, 35, 47, 31 x 16, 47 x 24, and 63 x 24 IN
- Four color temperature options at 90+ CRI (Color Rendering Index)
- NRC rating of .95



SPECIFICATIONS

SERIES	LENGTH/WIDTH ¹	HEIGHT ¹	LENS SHAPE/SIZE ⁵	LENS LOCATION	DIRECT OUTPUT ⁶	
OBF-L-DF	31" X 16" (806 MM X 406 MM) 47" X 24" (1206 MM X 606 MM) 63" X 24" (1606 MM X 606 MM) 71" X 35" (1806 MM X 906 MM) ² 87" X 35" (2206 MM X 906 MM) 94" X 47" (2406 MM X 1206 MM) CL___-CW___ ³	12" (300 MM) 19" (475 MM) 24" (600 MM) 33" (850 MM) 53" (1350 MM) 100" (2550 MM) CH___ ⁴	DISC DS 16" (400 MM): 5000 LM MAX DM 24" (600 MM): 5000 LM MAX DL 35" (900 MM): 12000 LM MAX DXL 47" (1200 MM): 18000 LM MAX OBRound OS 31" X 16" (800 MM X 400 MM): 5000 LM MAX OM 47" X 24" (1200 MM X 600 MM): 9000 LM MAX OL 63" X 24" (1600 MM X 600 MM): 14000 LM MAX	CEN CENTERED OFF OFFSET/ CONCENTRIC	D___ REPLACE "___" WITH DESIRED LUMEN OUTPUT ⁶	
INDIRECT OUTPUT ⁷	CRI/CCT	CIRCUIT	CONTROL	VOLTAGE	EXTERIOR FELT (1.5 MM)	INTERIOR FELT (1.5 MM)
INA NO OUTPUT I750 750 LM I1000 1000 LM I1500 1500 LM I3000 3000 LM CIO___ CUSTOM OUTPUT ⁸	927K 930K 935K 940K	SC SINGLE CIRCUIT DC DUAL CIRCUIT (SHARED DIMMING)	10 0-10V TO 1%	UNV 120V/277V	15___ REPLACE "___" WITH DESIRED COLOR CODE FROM SWITCHES	15___ REPLACE "___" WITH DESIRED COLOR CODE FROM SWITCHES
PIPING	CORD COLOR ⁹	SUSPENSION TYPE	CEILING TYPE	CANOPY ¹²		
NP NO PIPING P___ REPLACE "___" WITH DESIRED COLOR CODE FROM SWITCHES	PC___ REPLACE "___" WITH DESIRED COLOR CODE FROM SWITCHES	AC___ 60" AIRCRAFT CABLE + (COLOR CODE) ¹⁰ ST___ 60" STRAP + (COLOR CODE) ¹⁰ TRD 3/8" THREADED ROD DT DIRECT TO	HC HARD CEILING ¹¹ ST STRUT SG STANDARD GRID TG TEGULAR GRID	RWH ROUND WHITE RBK ROUND BLACK SWH SQUARE WHITE SBK SQUARE BLACK		
FACTORY OPTIONS ¹³						
CSL___ CUSTOM SUSPENSION LENGTH 24" - 120" ¹⁴	CT___ CUSTOM THREAD + (COLOR CODE) ¹⁰	CF CENTER FEED	BABA BABA REQUIRED			
EM EMERGENCY BATTERY	2CP INCLUDE 2" CANOPIES					

1 IMPERIAL DIMENSIONS ARE NOMINAL. ACTUAL DIMENSIONS ARE METRIC.
 2 NOT AVAILABLE WITH THE OM 63" X 24" (1606 MM X 606 MM) LENS SHAPE/SIZE
 3 CUSTOM LENGTHS AVAILABLE BETWEEN 31" - 94" (806 - 2406 MM) AND CUSTOM WIDTHS AVAILABLE BETWEEN 12" - 47" (300 - 1200 MM).
 4 CUSTOM HEIGHTS AVAILABLE BETWEEN 12" - 100" (300 - 2550 MM).
 5 LENS SIZE NEEDS TO BE EQUAL TO OR LESS THAN FIXTURE SIZE.
 6 MINIMUM 2000 LM OUTPUT.
 7 MINIMUM HEIGHT OF 19" (475 MM) FOR INDIRECT OUTPUT.
 8 CONSULT FACTORY.
 9 POWER CABLE IS 18" LONGER THAN SUSPENSION LENGTH. CONSULT FACTORY FOR LONGER LENGTHS.
 10 REPLACE "___" WITH DESIRED COLOR CODE FROM SWITCHES.
 11 NOT AVAILABLE FOR DIRECT TO SUSPENSION TYPE.
 12 5" (127 MM) CANOPY PROVIDED FOR FEED. 2" (50.8 MM) CANOPIES FOR NON-FEED UPON REQUEST.
 13 LEAVE BLANK IF NOT APPLICABLE. STRING TOGETHER MULTIPLE SELECTIONS.
 14 REPLACE "___" WITH LENGTH OF DESIRED SUSPENSION.

EXAMPLE CATALOG #: OBF-L-DF-31(806)-16(406)-53(1350)-DS-OFF-D5000-I1500-935K-DC-10-UNV-15MY-15GF-PSK-PCBL-DT-ST-SWH

SABIN

© 2025 SABIN LLC. ALL RIGHTS RESERVED.
 CUSTOMIZE AT SABIN.BUILD
 DATE REVISED 09.30.2025



COLOR SWATCHES

OBF-L-DF

DATE	PROJECT	CATALOG #	FIXTURE TYPE
------	---------	-----------	--------------

FELT




PIPING



POWER CORD




AIRCRAFT CABLE



THREAD



SUSPENSION STRAP

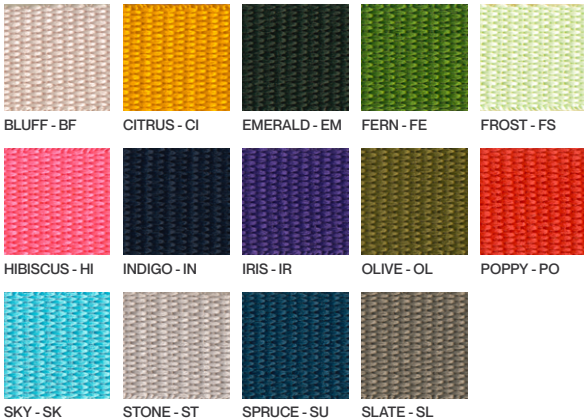































SIZE COMBINATIONS

OBF-L-DF

DATE	PROJECT	CATALOG #	FIXTURE TYPE
------	---------	-----------	--------------

CIRCULAR LIGHT ENGINE


























FIXTURE SIZE	LIGHT ENGINE POSITION	LIGHT ENGINE SIZE			
		Ø16" (400 MM)	Ø24" (600 MM)	Ø35" (900 MM)	Ø47" (1200 MM)
31" X 16" (806 MM X 406 MM)	CONCENTRIC				
	CENTERED				
47" X 24" (1206 MM X 606 MM)	CONCENTRIC				
	CENTERED				
63" X 24" (1606 MM X 606 MM)	CONCENTRIC				
	CENTERED				
71" X 35" (1806 MM X 906 MM)	CONCENTRIC				
	CENTERED				
87" X 35" (2206 MM X 906 MM)	CONCENTRIC				
	CENTERED				
94" X 47" (2406 MM X 1206 MM)	CONCENTRIC				
	CENTERED				

SIZE COMBINATIONS

OBF-L-DF

DATE	PROJECT	CATALOG #	FIXTURE TYPE
------	---------	-----------	--------------

OBROUND LIGHT ENGINE


FIXTURE SIZE	LIGHT ENGINE POSITION	LIGHT ENGINE SIZE		
		31" X 16" (806 MM X 406 MM)	47" X 24" (1200 MM X 600 MM)	63" X 24" (1600 MM X 600 MM)
31" X 16" (806 MM X 406 MM)	CONCENTRIC			
	CENTERED			
47" X 24" (1206 MM X 606 MM)	CONCENTRIC			
	CENTERED			
63" X 24" (1606 MM X 606 MM)	CONCENTRIC			
	CENTERED			
71" X 35" (1806 MM X 906 MM)	CONCENTRIC			
	CENTERED			
87" X 35" (2206 MM X 906 MM)	CONCENTRIC			
	CENTERED			
94" X 47" (2406 MM X 1206 MM)	CONCENTRIC			
	CENTERED			

DIMENSIONS

OBF-L-DF

DATE	PROJECT	CATALOG #	FIXTURE TYPE

FULL DIFFUSE

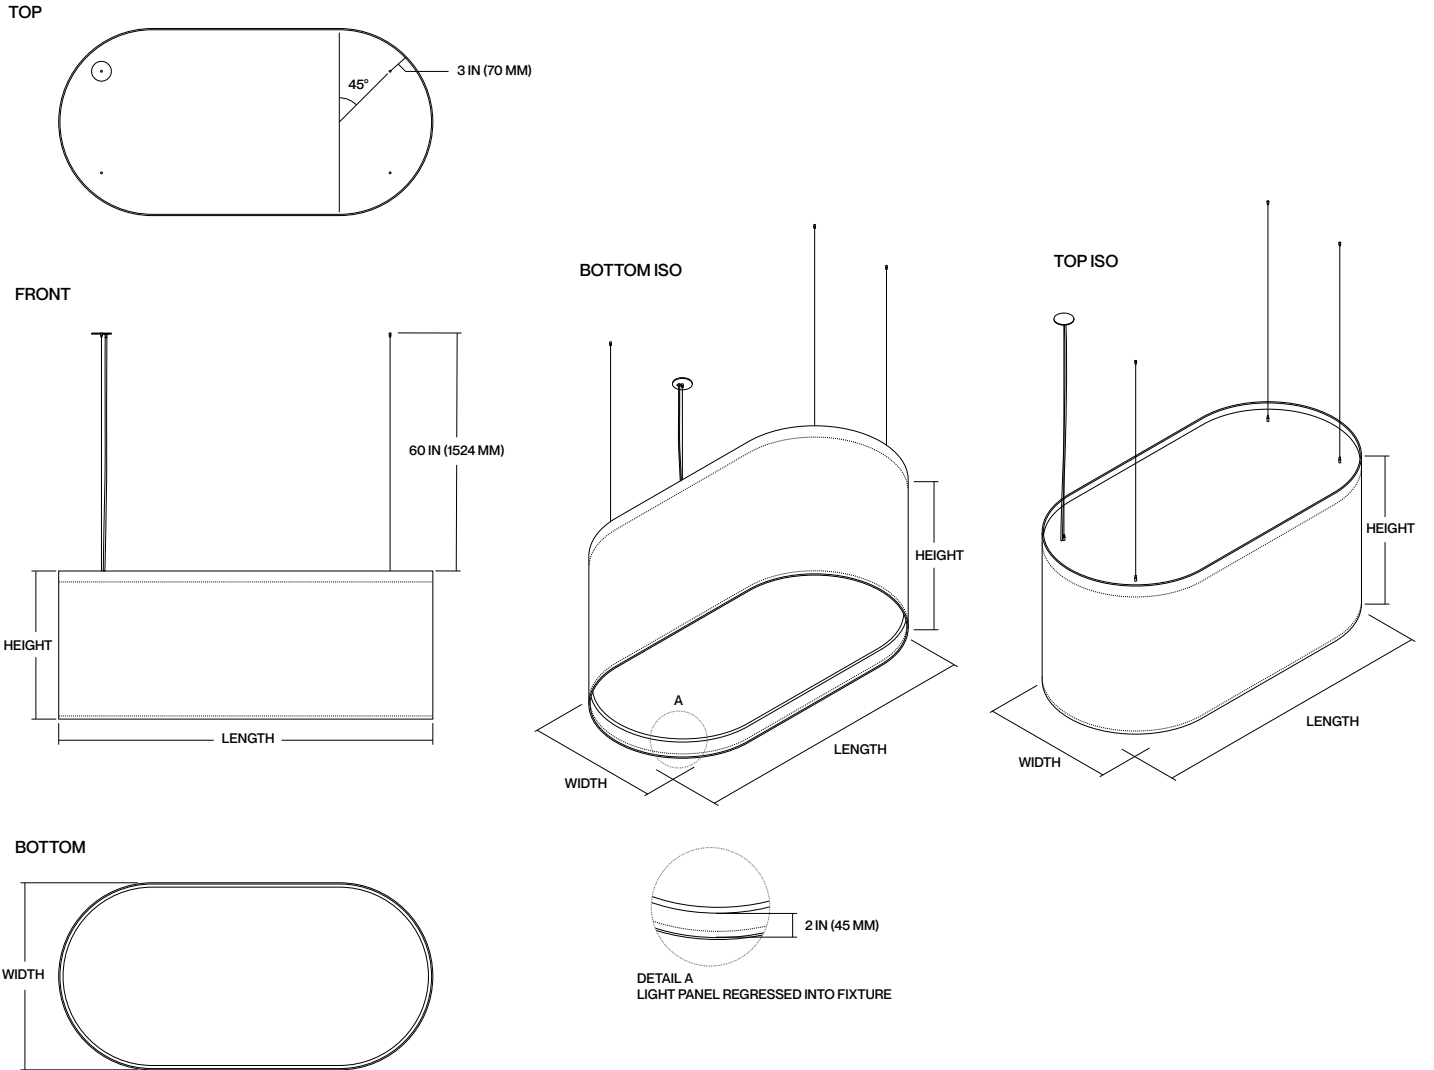


- 1 IMPERIAL DIMENSIONS ARE NOMINAL. ACTUAL DIMENSIONS ARE METRIC.
- 2 ALL STANDARD DIMENSIONS ARE ECO-CONSCIOUS. MAXIMIZING MATERIAL USE AND MINIMIZING WASTE. CUSTOM DIMENSIONS RESULT IN EXCESS MATERIAL WASTE.
- 3 PLEASE CONSULT THE FACTORY FOR WEIGHTS SPECIFIC TO CONFIGURATION.

DIMENSIONS

OBF-L-DF

DATE	PROJECT	CATALOG #	FIXTURE TYPE
------	---------	-----------	--------------

PARTIAL DIFFUSE - DISC

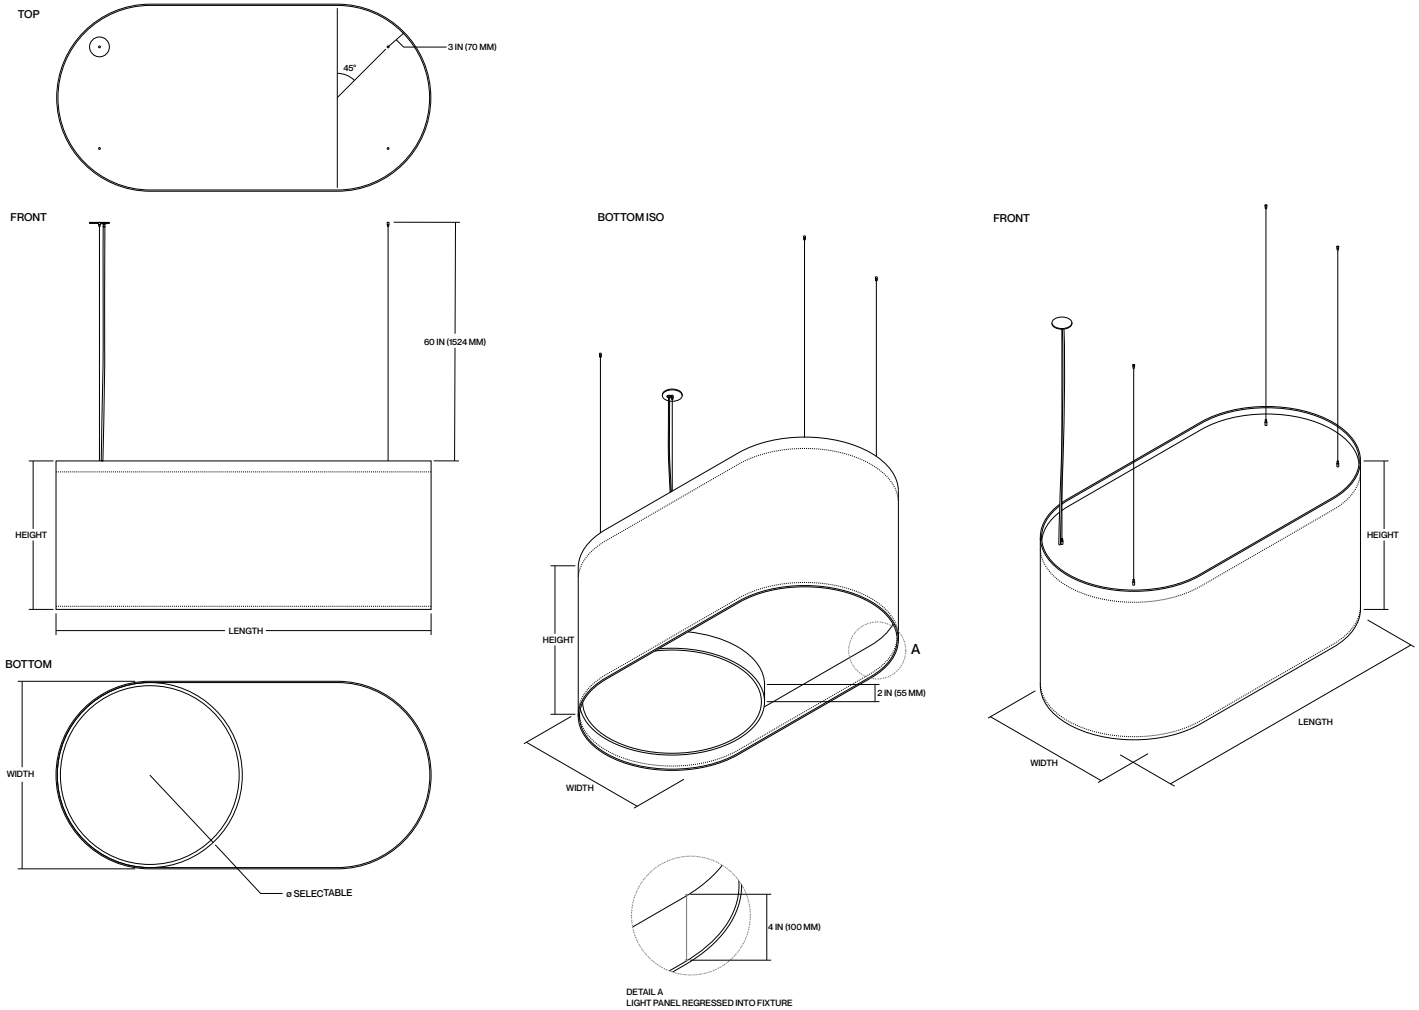


- 1 IMPERIAL DIMENSIONS ARE NOMINAL. ACTUAL DIMENSIONS ARE METRIC.
- 2 ALL STANDARD DIMENSIONS ARE ECO-CONSCIOUS. MAXIMIZING MATERIAL USE AND MINIMIZING WASTE. CUSTOM DIMENSIONS RESULT IN EXCESS MATERIAL WASTE.
- 3 PLEASE CONSULT THE FACTORY FOR WEIGHTS SPECIFIC TO CONFIGURATION.

DIMENSIONS

OBF-L-DF

DATE	PROJECT	CATALOG #	FIXTURE TYPE
------	---------	-----------	--------------

PARTIAL DIFFUSE - OBROUND

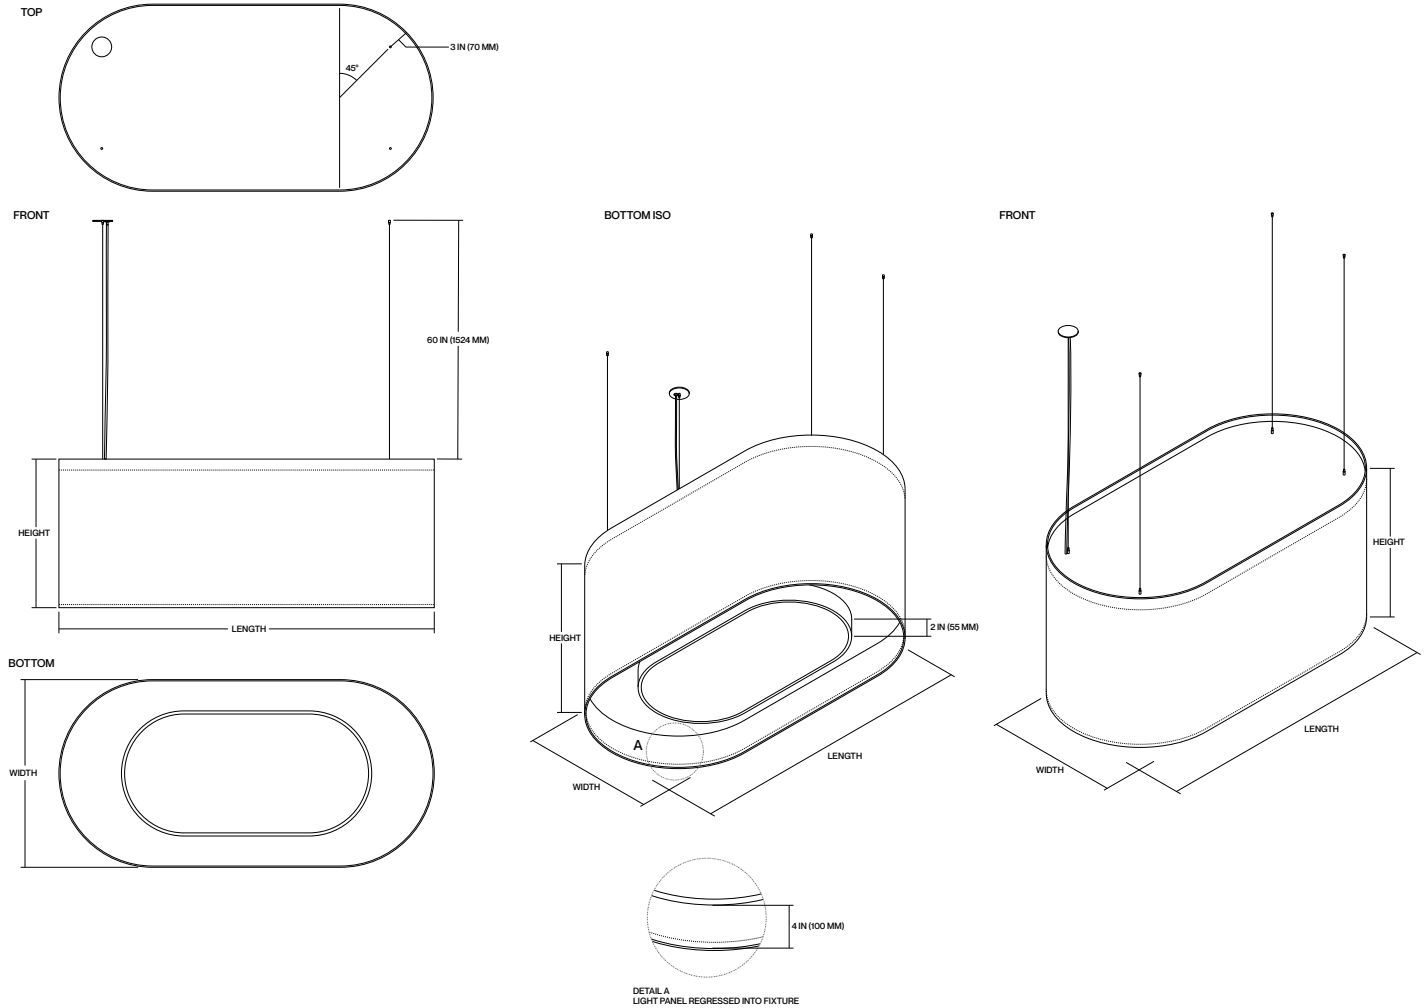

- 1 IMPERIAL DIMENSIONS ARE NOMINAL. ACTUAL DIMENSIONS ARE METRIC.
- 2 ALL STANDARD DIMENSIONS ARE ECO-CONSCIOUS. MAXIMIZING MATERIAL USE AND MINIMIZING WASTE. CUSTOM DIMENSIONS RESULT IN EXCESS MATERIAL WASTE.
- 3 PLEASE CONSULT THE FACTORY FOR WEIGHTS SPECIFIC TO CONFIGURATION.

ACOUSTIC PERFORMANCE

OBF-L-DF

TECHNICAL DATA

DATE	PROJECT	CATALOG #	FIXTURE TYPE
------	---------	-----------	--------------

OBFORMA

ALL SABIN PRODUCTS ARE SUBJECT TO ACOUSTIC TESTING. PERFORMANCE VALUES WILL VARY BASED ON INSTALLATION FACTORS SUCH AS DENSITY AND MOUNTING HEIGHT.


SABINS A SABIN IS A UNIT OF SOUND ABSORPTION DEFINED AS THE AMOUNT OF SOUND ABSORBED BY ONE SQUARE FOOT OF A PERFECT ABSORBER. IT WAS INITIALLY CONCEIVED AS THE EQUIVALENT OF 1 SQUARE FOOT OF OPEN WINDOW, REFLECTING NO SOUND BACK INTO THE INTERIOR. SABINS ARE USED TO EXPRESS THE TOTAL EFFECTIVE ABSORPTION FOR THE INTERIOR OF A ROOM. THIS CHART INDICATES AVERAGE SABINS PER UNIT AT THE NOTED FREQUENCIES WHICH REPRESENT THE TYPICAL RANGE OF HUMAN SPEECH OF 200-2500 HZ.

NRC NOISE REDUCTION COEFFICIENT (NRC) IS A SINGLE NUMBER VALUE RANGING FROM 0.0 TO 1.0 THAT DESCRIBES THE AVERAGE SOUND ABSORPTION PERFORMANCE OF A MATERIAL. AN NRC OF 0.0 INDICATES THE OBJECT DOES NOT ABSORB MID-FREQUENCY SOUND ENERGY, BUT REFLECTS IT. AN NRC OF 1.0 INDICATES THAT THE SOUND ABSORPTION PERFORMANCE OF THE MATERIAL IS EQUAL TO ITS SURFACE AREA (MEASURED IN UNITS SABIN), OR CONCEPTUALLY 100% SOUND ABSORPTION.

PROJECTED NRC = .95

TOTAL SOUND ABSORPTION WILL VARY BASED ON DESIGNED PRODUCT CONFIGURATION. SABIN TESTS ALL PRODUCTS IN MULTIPLE CONFIGURATIONS. PLEASE CONTACT SABIN OR YOUR LOCAL AGENT FOR MORE INFORMATION.

OBFORMA ACOUSTIC PERFORMANCE

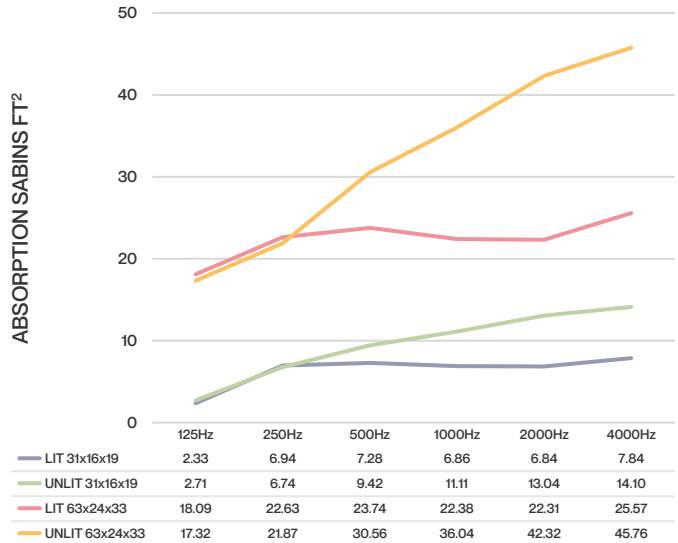

LIGHTING PERFORMANCE

OBF-L-DF


TECHNICAL DATA

DATE	PROJECT	CATALOG #	FIXTURE TYPE
------	---------	-----------	--------------

OBFORMA

LIT - DIFFUSE

PHOTOMETRIC PLOTS



SIZE ALL
 WATTAGE 41.9
 LUMENS 5723.0

DELIVERED LUMENS AND ENERGY USE

SIZE	OUTPUT (LUMENS)	DELIVERED (LUMENS)	ENERGY (WATTS)	EFFICACY (LPW)
31" X 16" (800 MM X 400 MM)	D2000	2000	14.73	135.80
	D3500	3500	25.61	136.65
	D5000	5000	36.41	137.33
47" X 24" (1200 MM X 600 MM)	D8000	8000	57.90	138.17
	D10000	10000	72.28	138.36
	D12000	12000	86.81	138.24
63" X 24" (1600 MM X 600 MM)	D14000	14000	101.58	137.82
	D16000	16000	116.71	137.09
	D18000	18000	132.29	136.06

*Based on 3500k, ≥90CRI. Lumen output and wattage may vary +/-5%.

CCT MULTIPLIER

CCT	2700K	3000K	3500K	4000K
CRI	90	90	90	90
MULTIPLIER	0.84	0.9	1	0.93

DATE	PROJECT	CATALOG #	FIXTURE TYPE
------	---------	-----------	--------------

ACOUSTIC MATERIAL

Our PET (polyester) felt panels contain minimum 60% post-consumer recycled polyester staple fiber. It is moisture resistant, fire rated, recyclable, and an outstanding absorber of acoustic energy.

- Fire retardant: ASTM E84 Class A, EN13501 Class B
- Construction: 100% polyester fiber (PET)
- Material certifications: OEKO-TEX® Standard 100, SCS Recycled Content, and Declare

CARE

Acoustic PET felt: Remove dust with compressed air, a vacuum or lint roller. Aluminum & polymer components: Remove dust and debris with a clean, dry, lint-free cloth.

CERTIFICATES/LISTING

This product is ETL listed and tested to meet UL standards for lit configurations. It complies with NEC and ANSI/NFPA 70 requirements, is RoHS compliant, and rated IP20 for use in dry, indoor locations only. 90 CRI configurations also meet Title 24 JA8-2016 requirements. Additionally, this product is GREENGUARD Gold certified and holds Declare, OEKO-TEX® Standard 100, and SCS Recycled Content certifications.

CONSTRUCTION

Acoustic luminaire comprised of ≥ 60% recycled PET material utilizing sewn construction to maximize strength, durability, and sound absorbency.

DIMMING (LIT ONLY)

Standard 120-277V constant current driver includes 0-10V analog dimming to 1%. Options for Lutron EcoSystem at 120/277V, TRIAC/ELV DALI, DMX, and Warm Dim available on select products. Consult factory.

ELECTRICAL (LIT ONLY)

High quality Class P isolated power supply with universal (120-277VAC) and 347V input voltage. Meets UL operation rating dry & damp (IP40) max 185°F (85°C) for 50,000 hour life. Luminaries are pre-wired with factory installed branch circuit wiring.

Power Factor:

- 0.95 @ 120VAC
- 0.90 @ 277VAC
- 0.90 @ 347VAC

For fixtures specified with an emergency battery/driver: 6W-20W integral battery (output dependent) with self-testing/metal test switch/indicator light (bi-color). Up to 15% of total lumen output for a minimum of 90 minutes. Listed to UL924 and tested to CSA 22.2 No.141 Field or Factory Installation (Indoor and Damp). Output Class 2 Compliant. Input CEC Title 20 Compliant.

ESTIMATED LIFETIME (LIT ONLY)

L70 = >60,000 Hours. Luminous flux maintenance life L70(9k) based on IES TM-28-147 9000-hour test at Ta= 45°C.

CONSULT FACTORY FOR SPECIFIC PRODUCT CONFIGURATIONS.

SABIN

© 2024 SABIN LLC. ALL RIGHTS RESERVED.
 CUSTOMIZE AT SABIN.BUILD
 DATE REVISED 09.30.2025

LED LIGHT ENGINE (LIT ONLY)

Light module incorporates premium LEDs with heat sink to maximum lifetime. Available in 2700K, 3000K, 3500K or 4000K CCT with ≥90 CRI. Color accuracy = minimum 2.2x SDCM @ 3000K ±66K ΔLUV +0.0004 Standard deviation color matching (SDCM) based on ANSI standard C78.377A indicating the visible variance in correlated color temperature, also referred to as “MacAdam ellipse.”

MOUNTING

Suspended by various methods including 1/16” aircraft cable, straps, grid clips or 3/8” threaded rod (adapters provided, threaded rod by others). Aircraft cable is available in precut lengths of 60” (1524 MM) or custom length from 24” (600 MM) to 120” (3048 MM). For lit units, fabric-covered power cord is provided along with a 5” (127 MM) feed canopy.

OPTICS (LIT ONLY)

Injection molded, cut or extruded acrylic lens designed for efficient and homogeneous light distribution with superior color over angle performance. Beam control available on select configurations down to 15° and up to +90°. Optics are field changeable.

WARRANTY

Fixture rated for operation in conditioned environments up to 77°F (25°C). Fixture is warranted to be free from defects and/or failure under normal use and proper storage for five (5) years from date of shipment.



Declare.

PET Acoustic Felt
Sabin LLC

Final Assembly: Chicago, Illinois, USA
Life Expectancy: 30 Year(s)
End of Life Options: Salvageable/Reusable in its Entirety, Recyclable (100%)

Ingredients:

Polyethylene Terephthalate: Polyethylene Terephthalate; **Octadecanamide, N,N'-1,2-ethanedilylbis-:** Octadecanamide, N,N'-1,2-ethanedilylbis-; **Stearic Acid:** Stearic Acid; **Benzenepropanoic acid, 3,5-bis(1,1-dimethylethyl)-4-hydroxy-, octadecyl ester:** Benzenepropanoic acid, 3,5-bis(1,1-dimethylethyl)-4-hydroxy-, octadecyl ester; **Benzenamine, 4-(1-methyl-1-phenylethyl)-N-[4-(1-methyl-1-phenylethyl)phenyl]-:** Benzenamine, 4-(1-methyl-1-phenylethyl)-N-[4-(1-methyl-1-phenylethyl)phenyl]; **Titanium dioxide:** Titanium dioxide

Living Building Challenge Criteria: Compliant

I-13 Red List:
 LBC Red List Free % Disclosed: 100% at 100ppm
 LBC Red List Approved VOC Content: Not Applicable
 Declared

I-10 Interior Performance: Not Applicable
I-14 Responsible Sourcing: Not Applicable

SAB-0001
 EXP. 01 JUN 2025
 Original Issue Date: 2023

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
 INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare

